


SCADAPack 470 | 474

Remote Programmable
Smart RTUs

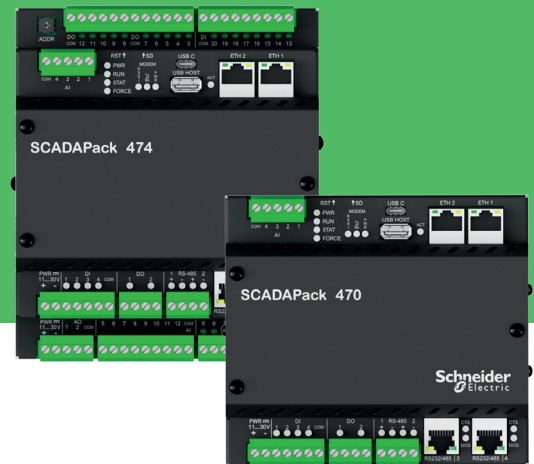

Product at a glance

SCADAPack™ x70 is the latest generation of SCADAPack Smart RTUs. The SCADAPack 470 and 474 Smart RTUs are the newest models to be introduced in this new series.

Simplicity: SCADAPack RemoteConnect configuration software facilitates configuration, logic development, and diagnostics in a single application, helping to reduce costs and overhead associated with maintaining multiple software applications for managing a single device.

Efficiency: The SCADAPack x70 Logic Editor within RemoteConnect software is based on EcoStruxure™ Control Expert (Unity Pro) software components, allowing for code reuse and sharing between Schneider Electric Modicon™ PLCs and SCADAPack Smart RTUs.

Ruggedized: Designed with Cybersecurity and ruggedized communications in mind, SCADAPack 47x hardware features conformal-coated boards and wide operating temperatures of -40...70 °C (-40...158 °F). Class I, Div. 2 hazardous area certifications included.

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Product Highlights:

Flexible Protocol Implementation

- Easily associate Modbus™, DNP3, or both protocols to database objects and variables
- DNP3 routing and Modbus Store and Forward facilitate communications bridge functionality using either protocol

Tagged (named) Object Database

- Improved readability and debugging of configuration and logic

Microsoft® Excel Export and Import of Database Objects

- Create external templates for reuse and manipulation of configurations
- Reduce engineering time and costs for large systems with common configurations

SCADAPack x70 Logic Editor

- Based on EcoStruxure Control Expert (Unity Pro) software with 5-language support for IEC 61131-3
- Code segment and function block export and import for code sharing between Schneider Electric Modicon PLCs and SCADAPack RTUs
- Leverage experience and personnel training across remote (RTU) and in-plant (PLC) projects

Remote Maintenance

- Update firmware, load/update logic, load configurations, and view diagnostics remotely or locally with RemoteConnect software
- Manage and configure multiple devices such as HART® instruments, actuators, variable frequency drives (VFDs), and other devices using plug-in DTMs for FDT2 or FDT1.2 within RemoteConnect software

Remote Ready Hardware

- 12...24 Vdc Input Power with input voltage monitor
- Wide operating temperature -40...70 °C (-40...158 °F)
- Conformal-coated circuit boards



Typical applications for SCADAPack 470/474 RTUs

Oil and Gas:

- Tank monitoring and automation
- Well test automation
- Well production and optimization
- Measurement

Water and Wastewater

- Leakage detection
- Equipment monitoring and control
- Water quality monitoring
- Irrigation
- DMAs (District Metering Areas), PMAs (Press. Monitoring Areas)
- Monitoring flow / level / pressure and temperature, etc. and many others...

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Configuring and programming SCADAPack 47x RTUs

RemoteConnect software

RemoteConnect software facilitates configuration, diagnostics, logic development, and device management:

- Locally through any of the communication ports (default: USB device port)
- Remotely through serial¹ or TCP/IP networks and modems

Device Management

- Upgrade of SCADAPack firmware
- Upgrade of I/O expansion module firmware²
- HART device configuration and data monitoring via vendor supplied plug-in DTMs³
- Asset Management Software (AMS) TCP/IP network access to HART instruments and actuators via HART pass through

Logic Development (SCADAPack x70 Logic Editor)

- Choose from five IEC 61131-3 compliant languages
- Use compiled run-time code for fast execution
- Import and export logic code segments for use in other SCADAPack projects or sharing⁴ with Modicon PLC projects
- Perform online debugging and logic modifications from the SCADAPack x70 Logic Editor
- Develop and write logic to a running system without interruption to the logic
- Deploy new logic code between scans with minimal effect on execution time



Configuration

- Use descriptive naming of objects to enhance development, debugging, and translation to host systems
- Import or export configurations for templating and bulk editing externally in Excel
- Group, filter, and sort objects for easy editing and viewing with RemoteConnect software object browsers

Diagnostics

- View system information and status from object browsers within RemoteConnect software
- View advanced diagnostics using the Telnet command line interface, including built-in protocol analyzers for DNP3 and Modbus

1. Online connection between RemoteConnect software and the SCADAPack requires DNP3 protocol. Modbus will be supported in the future to allow for online connection over Modbus serial networks.

2. I/O expansion module firmware upgrades are supported on 6xxx modules only.

3. DTM is Device Type Manager – vendor-supplied device driver for device-specific configuration and data display. RemoteConnect software is an FDT2 (Field Device Tool version 2) container for compatible DTMs.

4. Sharing of logic code does not include hardware specific functions or system variables that are not common to both platforms.

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Specifications

Architecture

Processor	Dual ARM® Cortex® A7, plus ARM Cortex M3; 500 Mhz
Memory	<ul style="list-style-type: none"> • SRAM – 4 MB, battery backed static RAM • DDR3 RAM – 256 MB, dynamic RAM • NAND Flash – 256 MB, flash memory
Maximum DNP3 events	40,000; Reduced if database objects exceed approximately 10,000 objects
Database capacity	<ul style="list-style-type: none"> • Maximum number of database objects: Typically 15,000 • Maximum number of database objects linked with logic programming: Typically 6,000 • Object memory: <ul style="list-style-type: none"> • Typical 2,600,000 bytes (event buffer at 5000 events) • Maximum: 2,756,800 bytes (event buffer at 100 events) • Minimum: 1,480,000 bytes (event buffer at 40,000 events)
Maximum DNP3 Outstation devices (polled by the SCADAPack when it is operating as a DNP3 Master)	Approximately 90
Maximum DNP3 Outstation objects (polled by the SCADAPack when it is operating as a DNP3 Master)	Approximately 15,000 ⁵ across DNP3 Outstation devices
Maximum Modbus Server Devices when polled using the configurable Modbus Scanner ⁶	150
Maximum objects mapped from Modbus devices	3,000 ⁵
File system storage	Approximately 70 MB
USB host storage	<ul style="list-style-type: none"> • Single-partition plug-in USB mass storage devices up to 32 GB • File format: FAT32

Communications

Serial Ports: 1, 2	RS-485: 2-wire half-duplex operation. 4-pin removable terminal block, maximum baud rate 115,200 bps.
Serial Ports: 3, 4	<ul style="list-style-type: none"> • RS-232: Tx/D, Rx/D, CTS, RTS, DCD, DTR • RS-485: 2-wire half-duplex operation • 8-pin modular RJ45 jack, maximum baud rate 115,200 bps
Serial Port: 5	<ul style="list-style-type: none"> • RS-232: Tx/D, Rx/D, CTS, RTS, DCD, DTR • Switched power out for modem, 350 mA available at RTU inputs voltage 12...24 Vdc, 8-pin removable terminal block under top cover.
Serial Protocols	DNP3 level 4 outstation/master and peer-to-peer, Modbus RTU server/client
Ethernet Ports: Eth1, Eth2	8-pin modular RJ45 jack, 10/100 Mbps UTP (10/100 Base-T), transformer-isolated, switched or independent ports
IP Protocols	<ul style="list-style-type: none"> • DNP3 level 4 in TCP or in UDP Master/Outstation and peer-to-peer, • Modbus/TCP Server, Modbus/TCP Client • Telnet Server, FTP Server
USB Device Port	<ul style="list-style-type: none"> • USB 2.0-compliant C-type receptacle • Supports communications at 1.5 Mb/s and 12 Mb/s
USB Host Port	<ul style="list-style-type: none"> • USB 2.0-compliant A-type receptacle • Supports USB mass storage devices up to 32 GB • Supports communications at 1.5 Mb/s and 12 Mb/s

5. Varies depending on object types, DNP3 event storage, and integrated application memory usage.

6. Refer to product manual for details as actual maximum number of Modbus server devices depends on polling method(s) and port type (serial or Ethernet).

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Specifications – cont'd

General

Logic Control	RemoteConnect software (SCADAPack x70 Logic with five IEC 61131-3 languages)
I/O Terminations	3.3...0.08 mm ² (12...28 AWG), solid or stranded
Dimensions	<ul style="list-style-type: none"> SCADAPack 470: 142 mm W x 127 mm H x 67 mm D (5.59 in. x 5.00 in. x 2.64 in.) SCADAPack 474: 142 mm W x 166 mm H x 88 mm D (5.59 in. x 6.54 in. x 3.46 in.)
Packaging	<ul style="list-style-type: none"> Corrosion-resistant, stainless steel with black enamel paint Conformal-coated circuit boards
Environment	<ul style="list-style-type: none"> -40...70 °C (-40...158 °F) operating temperature when the unit is mounted horizontally on a vertical surface -40...65 °C (-40...149 °F) operating temperature when the unit is mounted in any other position -40...85 °C (-40...185 °F) storage temperature 5...95% relative humidity, non-condensing Pollution Degree 2, Installation Category I, Indoor use
Shock	IEC 61131-2 ½ sine, 15 ms, 15 g
Vibration	<ul style="list-style-type: none"> IEC 61131-2 5...8.4 Hz: Amplitude controlled, 7.0 mm (0.28 in) peak-to-peak 8.4...150 Hz: Acceleration controlled, 1.0 g peak

Power Supply

Input voltage	<ul style="list-style-type: none"> Rated Voltage 14...29 Vdc Turn-on 10...11.5 Vdc Turn-off 9...10 Vdc
Power requirements	<ul style="list-style-type: none"> 2.8 W (SCADAPack 470) 4 W (SCADAPack 474)
Maximum power input to controller (excluding modem)	8.4 W

Certifications

Industrial Standards	<p>Requirements specific to the SCADAPack functional characteristics, immunity, robustness, and safety:</p> <ul style="list-style-type: none"> IEC/EN 61131-2 CAN/CSA 22.2 No. 61010-1-12 and CAN/CSA 22.2 No. 61010-2-201 UL 61010-1 and UL 61010-2-201
CE Marking Compliance	<ul style="list-style-type: none"> For the latest information regarding product compliance with European Directives for CE marking, refer to the EU Declaration of Conformity issued for your product at se.com For the latest information regarding product compliance with RoHS, WEEE directives and REACH regulation, visit the Schneider Electric Check a Product portal at https://www.reach.schneider-electric.com
Installation in Classified Ex Area	Hazardous locations Class I, Division 2, groups A, B, C, and D, T4 and Class I, Zone 2, IIC according to CSA C22.2 No. 213-17 and ANSI/ISA 12.12.01
Specific Countries	<ul style="list-style-type: none"> For Australia and New Zealand: ACMA requirements for RCM marking For United States: FCC Part 15 Subpart B Class A

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Specifications – cont'd

Digital and Analog Inputs/Outputs

SCADAPack Smart RTU	Digital inputs 12...24 Vdc		Digital outputs		Pulse counter inputs (shared with DIs)		Analog inputs		Analog outputs
	DI 1...4	DI 5...20	DO 1...2	DO 3...12	DI 1...4	DI 5...12	AI 1...4	AI 5...12	AO 1...2
470	4	-	2	-	4	-	4	-	-
474	4	16	2	10	4	8	4	8	2

Digital Inputs	<p>DI 1...4 12...24 Vdc</p> <p>DI 5...20 (SCADAPack 474 only) 12...24 Vdc</p>
Pulse Counter Inputs	<p>DI 1...4 Max. 10 kHz (@ 50% duty cycle)</p> <p>Shared with first 8 digital input channels on lower I/O board</p> <p>DI 5...8 (SCADAPack 474 only) Max. 1.5 kHz (@ 50% duty cycle)</p> <p>DI 9...12 (SCADAPack 474 only) Max. 150 Hz (@ 50% duty cycle)</p>
Digital Outputs	<p>DO 1...2 Form A, NO (Normally Open) relays, 2 A @ 30 Vdc,</p> <p>DO 3...12 (SCADAPack 474 only) Form A, NO (Normally Open) relays, 2 A @ 30 Vdc</p>
Analog Inputs	<p>AI 1...4 0...20 mA, 4...20 mA, 0...5 Vdc, 1...5 Vdc, 12-bit resolution, unipolar, non-isolated, voltage/current selectable by software, configurable for 30 mSec high speed update rate</p> <p>AI 5...12 (SCADAPack 474 only) 0...20 mA, 4...20 mA, 0...5 Vdc, 1...5 Vdc, single-ended, isolated from logic and chassis. Filtering configuration 'none' results in fast sampling @100 mSec total for all 8 channels, '50/60Hz' filter configuration results in sampling @ 500mSec for all 8 channels</p>
Analog Outputs	<p>AO 1...2 (SCADAPack 474 only) 0...20 mA, 4...20 mA (voltage output with external resistor), 12-bit resolution over 0...20 mA range, single-ended, isolated from logic and chassis</p>
Internal (System) Analog Inputs	<ul style="list-style-type: none"> Input power supply voltage monitor, 36 Vdc full scale Memory/RTC battery voltage monitor Internal temperature monitor, measurement range -40...75 °C (-40...167 °F)
Clock calendar	±15 seconds per month at -40...70 °C (-40...158 °F)

Additional I/O

Supported Modules	<ul style="list-style-type: none"> 5304, 5405, 5414, 5415, 5506, 5606, 5607, 6601, 6607 When SCADAPack 47x controller is used with 5000-series I/O Expansion modules, order one Inter Module Cable (IMC) adaptor cable (ref. TBUM297138), to adapt from 20 signal lines (used by SCADAPack x70 Smart RTUs) to 16 signal lines (used by 5000-series IO modules) Maximum number of external expansion modules per unit: 15⁷
I/O Expansion Limits ⁷	<ul style="list-style-type: none"> Refer to the SCADAPack x70 Documentation Set > Hardware Manuals for further details. Maximum intermodule cable length (not including the short cables that come with each module) is 1.82 m (75 in.)

7. Additional power supply modules (model 5103) may be required for additional bus power, depending on how many expansion modules are included on the bus.

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Model Code

TBUP474UA50BB03S is an example of a SCADAPack 474 part number using the model codes below

Code	Select: Hardware platform
TBUP470	SCADAPack 470, 32-bit controller, Dual Core
TBUP474	SCADAPack 474, 32-bit controller, Dual Core comes with additional I/O

Code	Select: Firmware platform
U	SCADAPack x70 Firmware (RemoteConnect Configuration & IEC 61131-3 programming software, included)

Code	Select: SCADA Security
A	None
C	DNP3 Secure Authentication SAv2 (Security Administrator application required)

Code	Select: Protocol Option
5	DNP3 Serial/IP master/outstation/peer-to-peer, Modbus RTU/TCP client/server, TCP/IP

Code	Select: License Option
0	None
7	DNP3 Data Concentrator Master License – allows collection of DNP3 events and data from multiple outstations

Code	Select: Analog Inputs /Outputs
A	P470: 4 Analog Inputs, selectable as 0...20 mA, 4...20 mA, 0...5 Vdc, 1...5 Vdc
B	P474: adds 8 Analog Inputs, factory-shipped selectable as 0...20 mA, 4...20 mA, 0...5 Vdc, 1...5 Vdc, and 2 Analog Outputs, selectable as 0...20 or 4...20 mA

Code	Select: Digital Inputs/Outputs
A	P470: 4 Digital Inputs (12...24 Vdc), 2 Digital Outputs Form A, NO (Normally Open) relays
B	P474: adds 16 Digital Inputs (12...24 Vdc) and 10 Digital Outputs Form A NO (Normally Open) relays

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Model Code cont'd

TBUP474UA50BB03S is an example of a SCADAPack 474 part number using the model codes below

Code	Future Option
0	None


Code	Select: Realflo Flow Computer - Flow Run License Options
0	None
3	3 Runs - any combination of gas, liquid or water totaling 3 runs (gas runs include gas transmission option)
6	6 Runs - any combination of gas, liquid or water totaling 6 runs (gas runs include gas transmission option)
T	10 Runs - any combination of gas, liquid or water totaling 10 runs (gas runs include gas transmission option)

Code	Select: Certifications
S	FCC 47 CFR Part 15, Subpart B; ICES-003; CE and RCM markings, cULus Hazardous Location Class I, Division 2, Groups A, B, C and D, T4; and Class I, Zone 2, IIC


SCADAPack 470 | 474

Remote Programmable Smart RTUs

Dimensions - SCADAPack 470

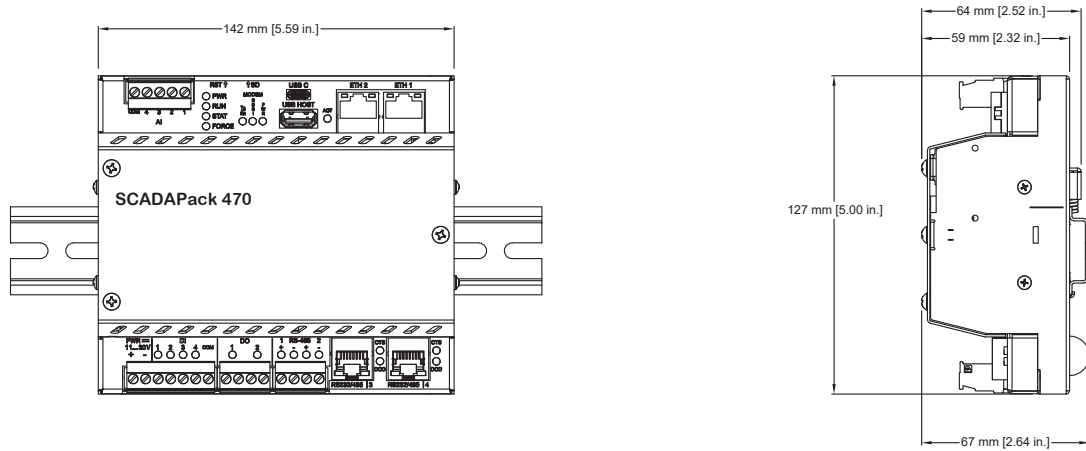


Dimensions - SCADAPack 474

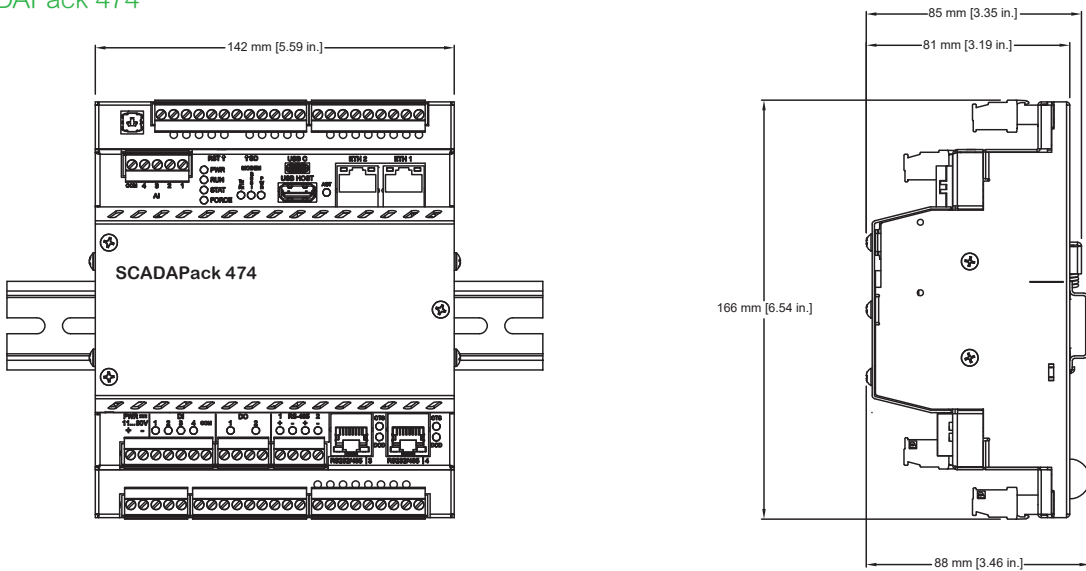

SCADAPack 470 | 474

Remote Programmable Smart RTUs

Terminal Adaptors

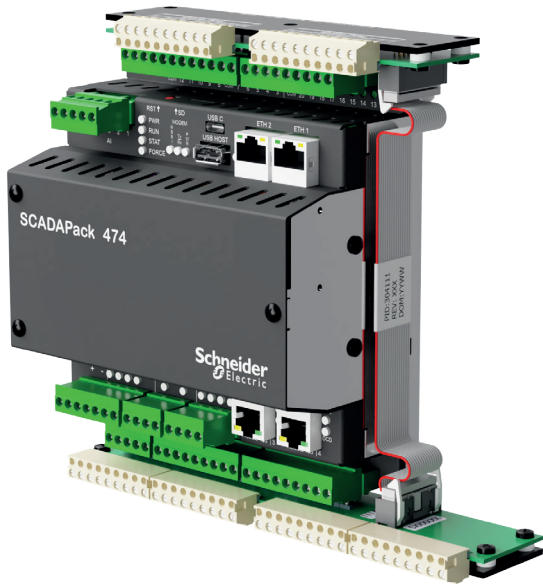

Optional terminal adaptors provide the possibility for drop-in wiring replacement of existing SCADAPack P1, or SCADAPack P4 RTUs. This approach can save substantial time and costs when upgrading existing panels to SCADAPack 474.

The terminal adaptors provide pin headers that accept the older style 'gray' plug-in terminal blocks. The adaptors position the terminal headers to approximately the same physical position as they are on the existing SCADAPacks. If panel space allows, and the wiring scheme is compatible with the terminal adaptors, the SCADAPack 474 can be placed into the existing panel, and existing wiring to the lower I/O board can be plugged onto the terminal adaptors without removing the wires from the terminal blocks.

Refer to data sheet p/n TBULM08038-10 for further details on the terminal adaptors.

This product is RoHS-compliant.

Refer to the SCADAPack x70 Documentation Set for further details.

Disclaimer: Schneider Electric reserves the right to change product specifications. For more information visit www.se.com.

Schneider Electric
Process Automation, SCADA & Telemetry
 415 Legget Drive, Suite 101, Kanata, Ontario K2K 3R1 Canada
 Direct Worldwide: +1 (613) 591-1943
 Email: telemetrysolutions@se.com
 Toll Free within North America: +1 (888) 267-2232
www.se.com

Life Is On

Schneider
 Electric

Part Number: TBULM08030-05 v15

© 2020 Schneider Electric. All Rights Reserved. Schneider Electric, Life Is On Schneider Electric, EcoStruxure, Modbus, Modicon and SCADAPack are trademarks and the property of Schneider Electric SE, its subsidiaries, and affiliated companies. All other trademarks are the property of their respective owners. – July 2020